


Sensira

FTXF + RXF



sensira

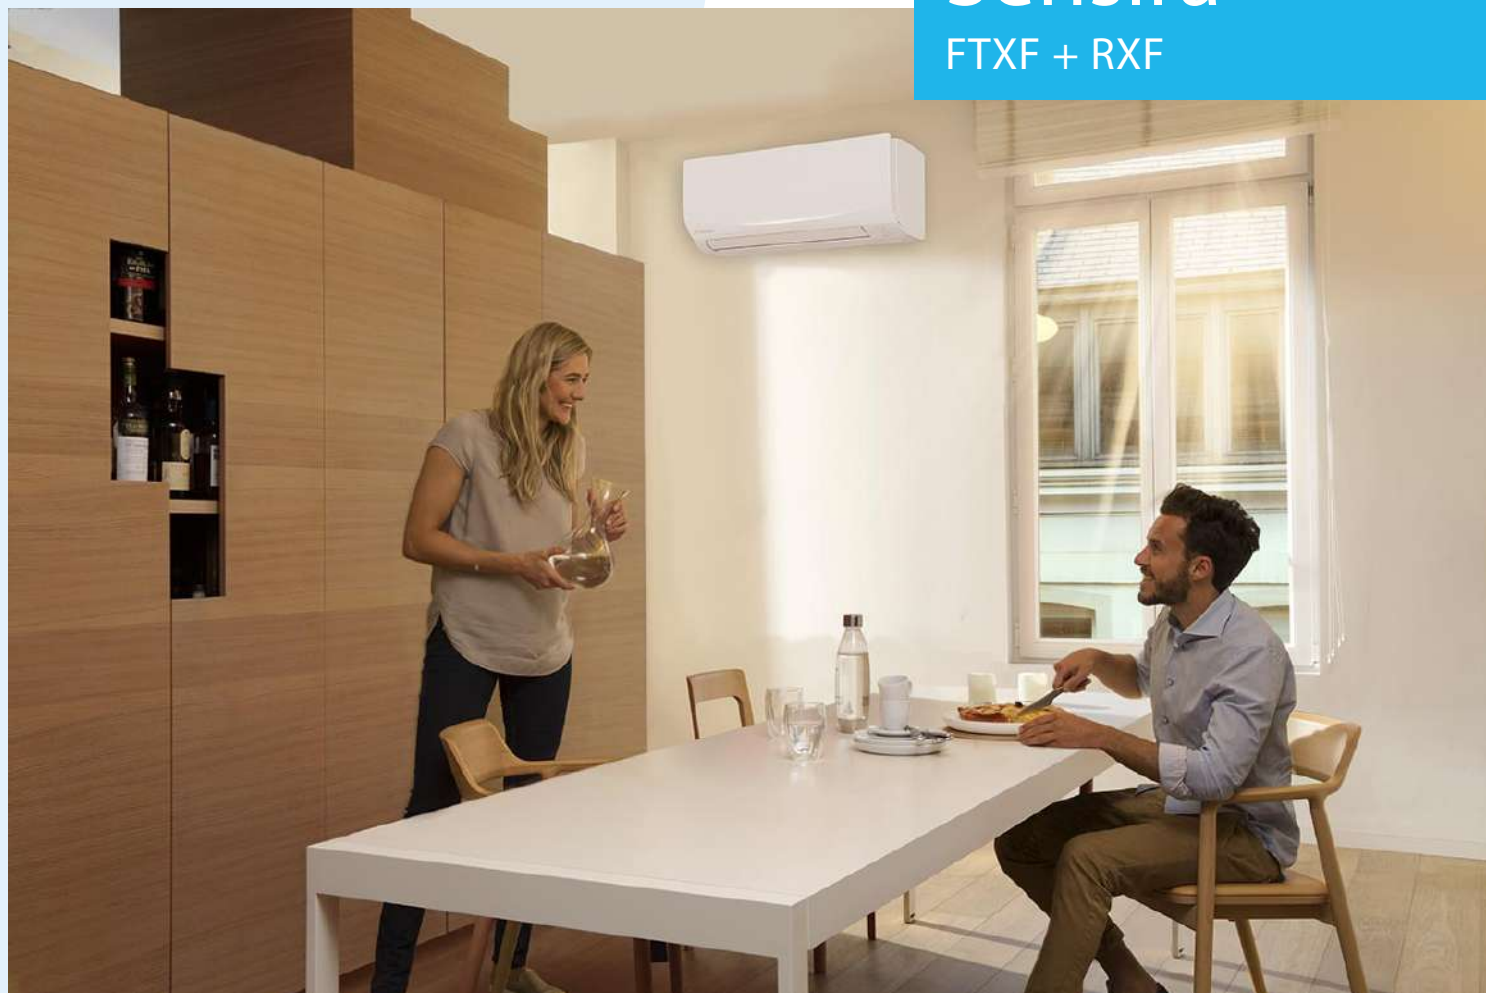

Comfort režim rada



Econo režim rada za
uštedu energije



Tihi rad unutrašnje
jedinice



Snažan način rada



24-časovni tajmer

- › Ravan, elegantan prednji panel lepo se uklapa u enterijer
- › Sa zvučnim pritiskom svedenim sve na 21 dBA, nova Sensira radi skoro nečujno
- › Stvara prijatno unutrašnje okruženje uz izvrsnu energetska efikasnost
- › Tajmer za programiranje rada uređaja
- › Koristi ekološki freon R-32 koji direktno utiče na smanjenje potrošnje električne energije
- › Sezonska efikasnost do A++ u hlađenju

FTXF + RXF

Energetska efikasnost do

A++



Podaci o efikasnosti			FTXF + RXF	20E + 20E	25E + 25E	35E + 35E	42E+42E	50D + 50D	60D + 60D	71D + 71D
Kapacitet hlađenja	Nom.		kW	1,3/2,0/2,4	1,3/2,5/2,8	1,3/3,3/3,8	1,4/4,2/4,3	1,7/5,0/6,0	1,7/6,0/7,0	2,3/7,1/7,3
Kapacitet grejanja	Nom.		kW	1,3/2,4/3,3	1,3/2,8/3,7	1,3/3,5/4,0	1,4/4,6/5,0	1,7/6,0/7,7	1,7/6,4/8,0	2,3/8,2/9,0
Apsorbovana snaga	Hlađenje	Min./Nom./Maks.	kW	0,31/0,51/0,72	0,31/0,77/1,05	0,29/1,00/1,40	0,31/1,27/1,50	0,32/1,50/1,83	0,33/1,85/2,98	0,44/2,77/3,27
	Grejanje	Min./Nom./Maks.	kW	0,25/0,64/0,95	0,25/0,70/1,11	0,29/0,94/1,50	0,25/1,24/1,40	0,44/1,62/2,36	0,46/1,63/2,79	0,61/2,21/3,30
Sezonska efikasnost (u skladu sa EN14825)	Hlađenje	Oznaka energetske efikasnosti		A++						A
		Pdesign	kW	2,00	2,50	3,50	4,20	5,00	6,00	7,1
		SEER		6,50	6,50		6,50	6,21	6,15	5,15
	Grejanje (prosečna klima)	Godišnja potrošnja energije	kWh	108	135	188	226	282	342	483
		Oznaka energetske efikasnosti		A+						A
		Pdesign	kW	2,20	2,40	2,60	3,30	4,60	4,80	6,20
		SCOP/A				4,30	4,06			3,81
		Godišnja potrošnja energije	kWh	733	801	867	1075	1585	1654	2.275

Unutrašnja jedinica			FTXF	20E	25E	35E	42E	50D	60D	71D
Dimenzije	Uređaj	Visina x Širina x Dubina	mm	286x770x225			286 x770 x225	295x990x263		
Filter za vazduh	Tip			Uklonjiv/periv						
Nivo zvučnog pritiska	Hlađenje	Visoko/Nisko/Tihi rad	dBa	39/25/20	40/26/20	43/27/20	45/30/22	43/34/31	45/36/33	46/37/34
	Grejanje	Visoko/Nisko/Tihi rad	dBa	39/28/21	40/28/21	40/29/21	44/28/22	42/33/30	44/35/32	45/36/33

Spoljna jedinica			RXF	20E	25E	35E	42E	50D	60D	71D
Dimenzije	Uređaj	Visina x Širina x Dubina	mm	550x658x275			550 x658 x275	734x870x373		734x870x373
Nivo zvučnog pritiska	Hlađenje	Visoko	dBa	46		48	48	47	49	52*
	Grejanje	Visoko	dBa	47		48		49		52*
Radni opseg	Hlađenje	Spoljna temp. Min.~Maks.	°CDB	-10~48						
	Grejanje	Spoljna temp. Min.~Maks.	°CWB	-15~18						
Freon	Tip / Punjenje/ GWP	Punjenje: kg / TCO ₂ eq		R-32/0,55/0,37/675		R-32/0,70/0,48/675	R-32/675/0,750/0,51	R-32/0,90/0,61/675,0	R-32/1,150,78/675,0	R-32/1,150,78/675,0
Povezivanje cevi	Dužina cevi	SJ - UJ	Maks.	20			30			
	Visinska razlika	UJ - SJ	Maks.	12			20			

