



CD – centrifugalni rekuperatori

CD –centrifugalni rekuperatori

Protok vazduha (m³/h)

Eksterni pad pritiska (Pa)

Koeficijent efikasnosti rekuperatora (%)

El. Napajanje

El. Snaga (W)

El. Struja (A)

Filter za vazduh

Dužina (mm)

Visina (mm)

Širina (mm)

Kanalska Prirubnica - dimenzija* (mm)

Servisni prostor (mm)

Nivo buke db(A)

3.000

840 do 2.700

420 do 70

U zavisnosti od parametara vazduha i do 70% sa **Klingenburg Aluminium Recuperator**

230V / 50Hz

2x(490 do 840)

2.14 do 3.66

Klasa **G4** - Sintetički filter kasetnog tipa na usisu svežeg i otpadnog vazduha

1.700

660

1.200

400x400


800



54.7

* ili po zahtevu

Napomena: CD je sa 5 brzinskim centrifugalnim ventilatorima uz elektroorman i kontrolu koja se poručuje opciono

CD 3.000

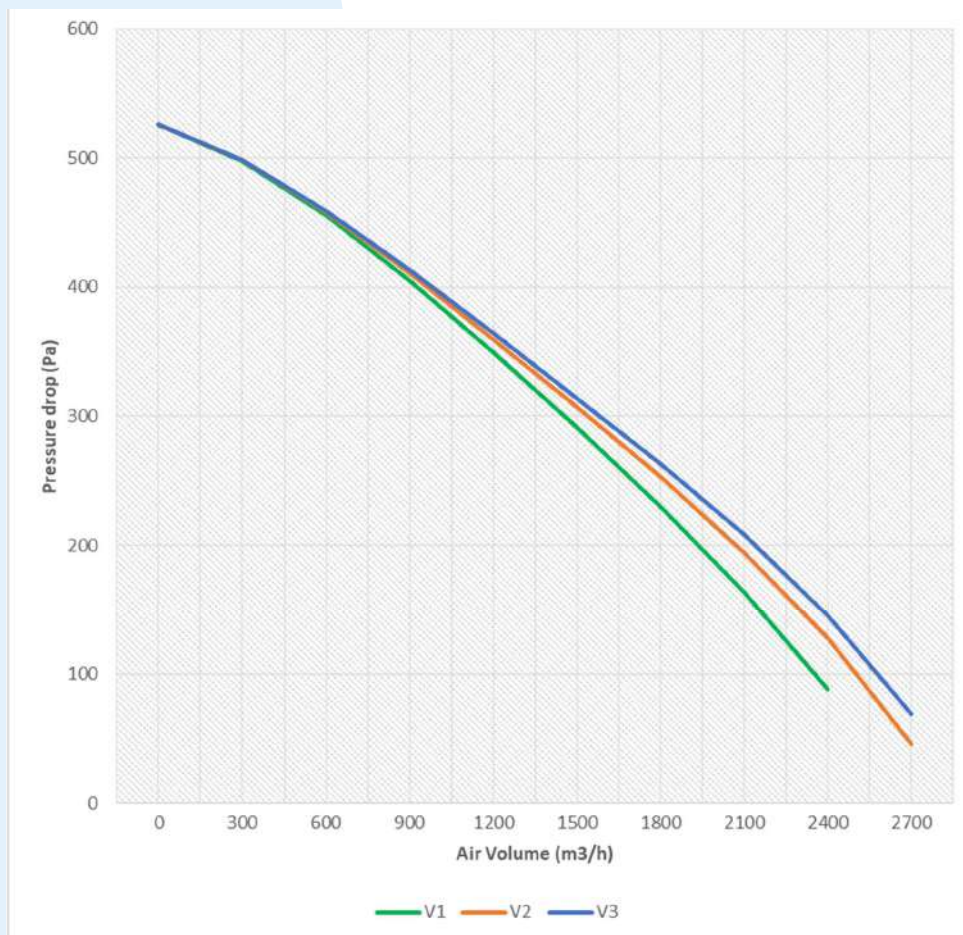

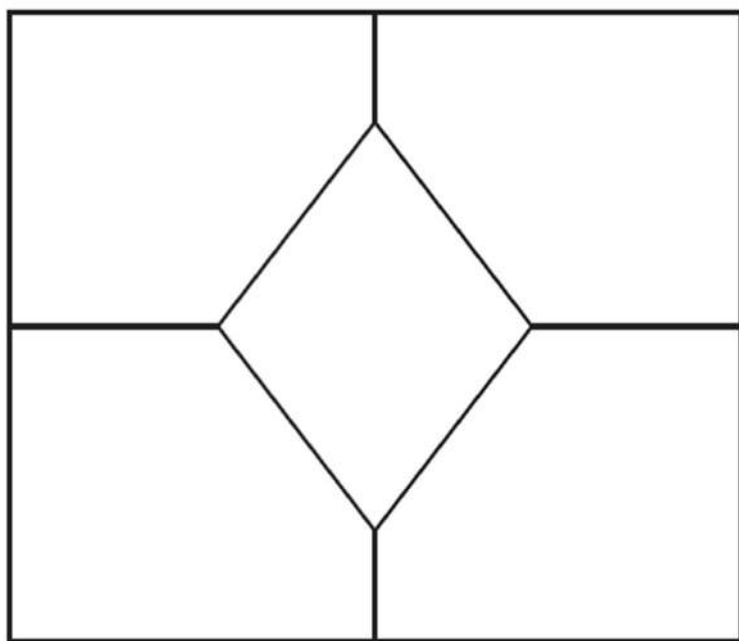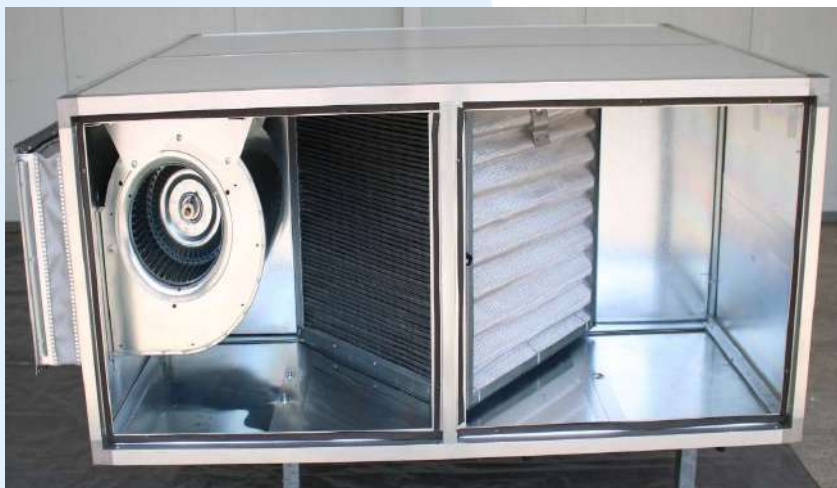

Na ovoj šemi je potrebno označiti:

- položaj ventilatora;
- tehničke prilaze filterima i ventilatorima (odozgo, odozdo, sa strane);
- poziciju elektro priključka;
- željeni kapacitet (m³/h);
- napor (Pa);
- stepen iskorišćenja (u % od 50 do 70);
- dimenzije priključka;
- oblik priključka;
- način vođenja rekuperatora (Da li je potrebna elektronika ili ne i ako jeste, koja?).



CLIMATE DESIGN D.O.O. Javorska 6, 11226 Beograd,
Tel: +38162290789, +38162290599
E-mail: veleprodaja@climatedesign.rs, www.climatedesign.rs

