

Kanalski klima-uređaj

FDXM + RXM



Filter sa automatskim čišćenjem



Samo ventilator



Veći broj zona



Inverter





Primena multi-modela



Koraci brzine rada ventilatora

FDXM + RXM

- › Diskretno skriven u plafonu za elegantno snabdevanje čistim vazduhom
- › Suvi program omogućava smanjenje nivoa vlage bez varijacija u sobnoj temperaturi
- › Filter vazduha koji omogućava stalan dotok čistog vazduha u vašem domu

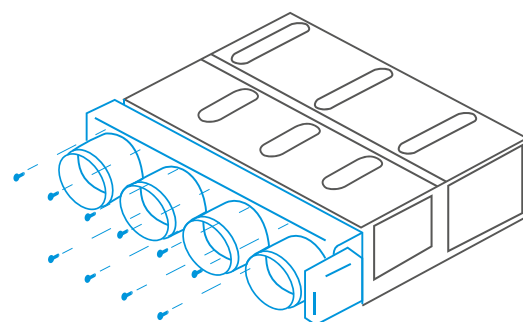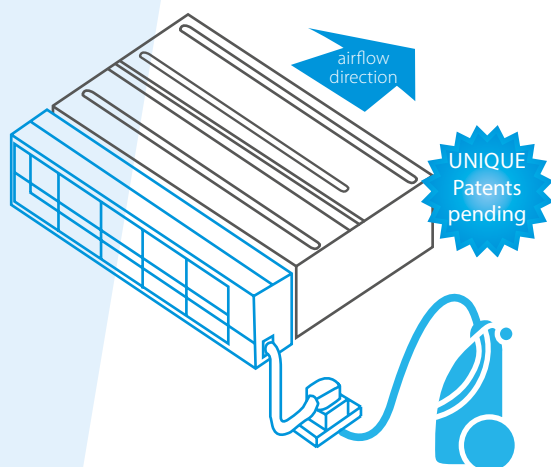

Plug and play plenum

FDXM + RXM

Energetska efikasnost do

A+



Podaci o efikasnosti			FDXM + RXM	25F3 + 25M9	35F3 + 35M9	50F3 + 50M9	60F3 + 60M9
Kapacitet hlađenja	Nom.	kW		2,4	3,4	5,0	6,0
Kapacitet grejanja	Nom.	kW		3,2	4,0	5,8	7,0
Apsorbovana snaga	Hlađenje	Nom.	kW	0,64	1,14	1,63	2,05
	Grejanje	Nom.	kW	0,80	1,15	1,87	2,18
Sezonska efikasnost (u skladu sa EN14825)	Hlađenje	Oznaka energetske efikasnosti		A+	A	A+	A
		Pdesign	kW	2,40	3,40	5,00	6,00
		SEER		5,68	5,26	5,77	5,56
		Godišnja potrošnja energije	kWh	148	226	303	315
	Grejanje (prosečna klima)	Oznaka energetske efikasnosti		A+		A	
		Pdesign	kW	2,60	2,90	4,00	4,60
		SCOP/A		4,24	3,88	3,93	3,80
		Godišnja potrošnja energije	kWh	858	1046	1.424	1.693

Unutrašnja jedinica				FDXM	25F3	35F3	50F3	60F3
Dimenzije	Uređaj	Visina x Širina x Dubina	mm		200x750x620		200x1150x620	
Filter za vazduh	Tip				Uklonjiv/periv			
Nivo zvučnog pritiska	Hlađenje	Visoko/Nisko	dBA		35/27		38/30	
	Grejanje	Visoko/Nisko	dBA		35/27		38/30	

Spoljna jedinica			RXM	25M9	35M9	50M9	60M9
Dimenzije	Uređaj	Visina x Širina x Dubina	mm	550x765x285		735x825x300	
Nivo zvučnog pritiska	Hlađenje		dBA	59	61	62	63
	Grejanje		dBA	59	61	62	63
Radni opseg	Hlađenje	Spoljna temp. Min.~Maks.	°CDB	-10~46			
	Grejanje	Spoljna temp. Min.~Maks.	°CWB	-15~18			
Freon	Tip / Punjenje/ GWP	Punjenje: kg / TCO ₂ eq		R-32/0,76/0,52/675		R-32/1,40/0,95/675	R-32/1,45/0,98/675
Povezivanje cevi	Dužina cevi	SJ - UJ Max.	m	20,0		30	
	Visinska razlika	UJ - SJ Max.	m	20,0			
Struja - 50Hz	Maksimalna jačina osigurača (MFA)*		A	10		15	



Kompanija Daikin Europe N.V. učestvuje u programu sertifikacije Eurovent koji se odnosi na klima-uređaje (AC), agregate za hlađenje tečnosti (LCP), klima komore (AHU), i ventilator-konvektore (FCU). Proverite onlajn tekuće važenje sertifikata. www.eurovent-certification.com ili using: www.certiflash.com



Heating&Cooling Expert d.o.o.
Official Daikin Sales Agent
Stanoja Glavaša 18 · 11000 Beograd
T. 011 6555 255 · office@hce.rs
www.daikin.rs



CLIMATE DESIGN D.O.O. Javorska 6, 11226 Beograd,
Tel: +38162290789, +38162290599
E-mail: veleprodaja@climatedesign.rs, www.climatedesign.rs

